





Pla

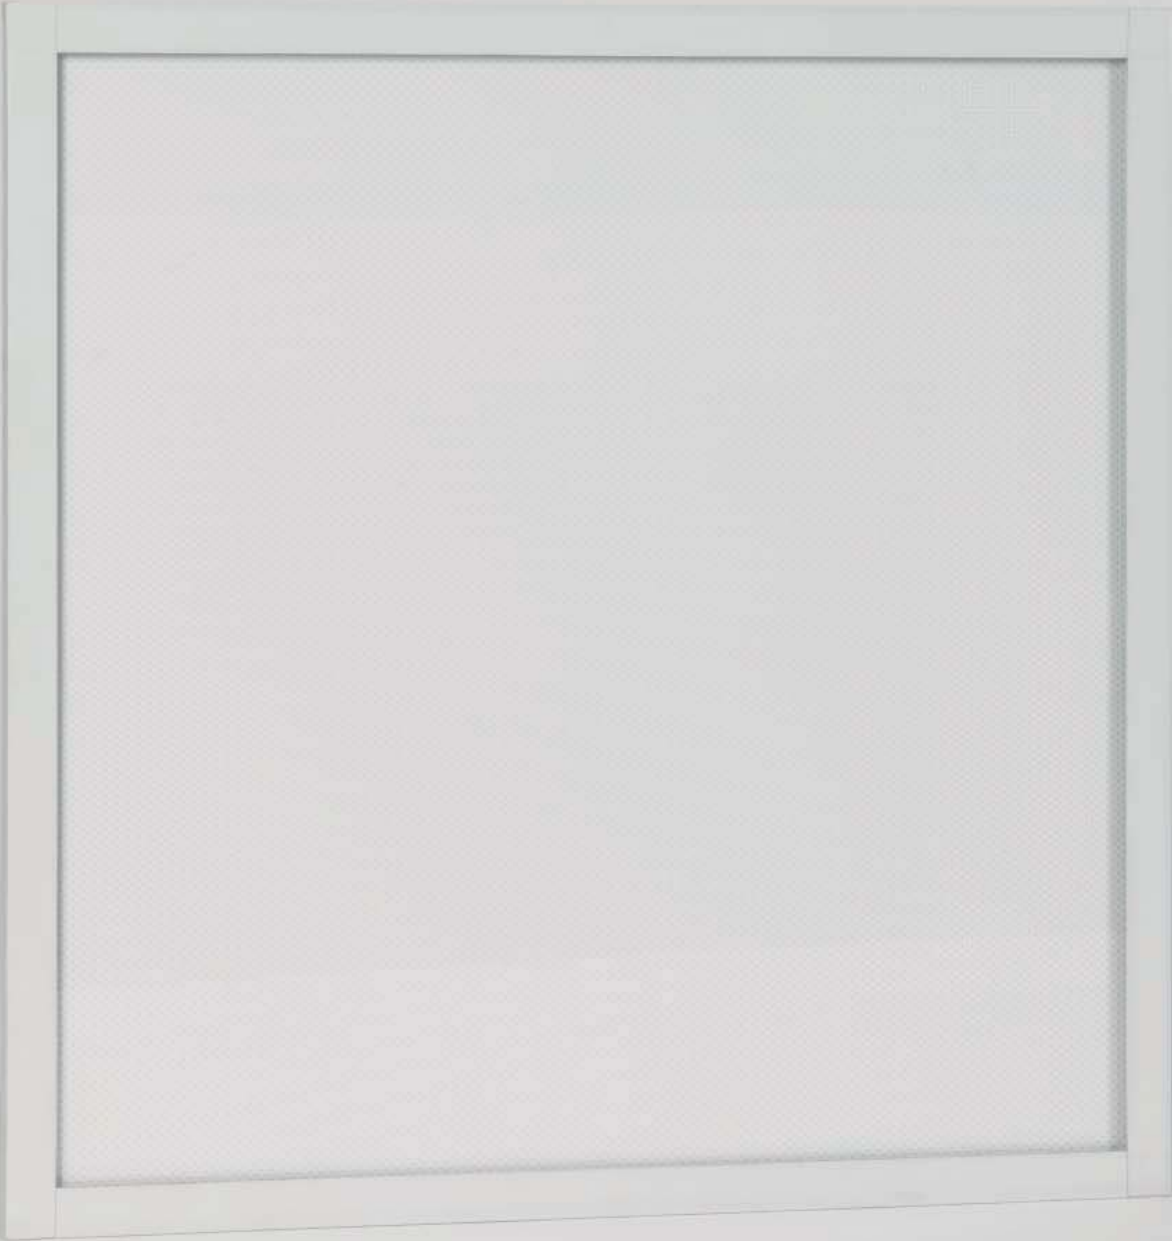

PLA A1 | CL - 120101 | Técnicas



CARACTERISTICAS

VOLTAJE	230 V
POTENCIA	32 W
CRI	>70


COLOR - LM

3200°K	1905 lm
4000°K	1986 lm
5600°K	2025 lm
RGB	

A MEDIDA

OPTICA
difusa

PLA A2 | CL - 120102 | Técnicas



CARACTERISTICAS

VOLTAJE	230 V
POTENCIA	21 W
CRI	>70


COLOR - LM

3200°K	1120 lm
4000°K	1180 lm
5600°K	1210 lm
RGB	

A MEDIDA

OPTICA
difusa

PLA A3 | CL - 120103 | Técnicas



CARACTERISTICAS

VOLTAJE	230 V
POTENCIA	12 W
CRI	>70


COLOR - LM

3200°K	646 lm
4000°K	670 lm
5600°K	698 lm
RGB	

A MEDIDA

OPTICA
difusa





CARACTERISTICAS

AMPERAJE	230 V
POTENCIA	10 W
CRI	>70

COLOR - LM

3200°K	478 lm
4000°K	495 lm
5600°K	504 lm
RGB	

A MEDIDA

OPTICA
difusa



Luminaria PLA (metacrilato microfresado iluminado) se puede fabricar a medida bajo especificaciones tecnicas (cad) mínimo pieza 70mm x 70mm, máximo 1200mm x 2500mm



